



# R-ELT EMERGENCY LIGHT TEST TIMER WITH REMOTE OPERATE FACILITY & BI-COLOUR LED



## The R-ELT emergency light test timer.

Model R-ELT is an automatic emergency light test timer. The unit is designed to facilitate the testing procedures of emergency lighting systems. The R-ELT has selectable time intervals to carry out both the functional test and a full load duration test.

When the R-ELT is idle, pressing the button on the front activates the timer.

Pressing and holding the button selects longer time intervals. The selected time interval is indicated by the colour and flash sequence of the LED.


Pressing and holding the button when the timer is active will abort the test and the timer will return to its idle state.

Order code: **R-ELT-230V**


## Specifications

<b>Supply</b>	: 220-240Vac $\pm$ 10% 1.5VA idle, 3VA active
<b>Time Ranges</b>	: selectable 60, 90 and 120 minute Other time ranges on request
<b>Output</b>	Single pole change over relay contacts Contact rating : AC1 (non-inductive) 2500VA, 10A 250Vac : AC15 (inductive) 500VA, 2A 250Vac Contact material : AgSnO <sub>2</sub> for resistive and capacitive loads with inrush currents <100A
<b>Temperature</b>	Operating : -10°C to $\pm$ 20°C to +50°C Storage : -20°C to +70°C
<b>EMC Compliance</b>	: AS/NZS 61000.6.3:2012
<b>Housing</b>	DIN rail mounted grey polyamide, flame retardant UL 94 V0.
<b>Terminals</b>	Rising clamp, nicked copper alloy clamp and tin plated copper alloy terminal Suitable for 2.5mm <sup>2</sup> conductor

## Housing Dimensions

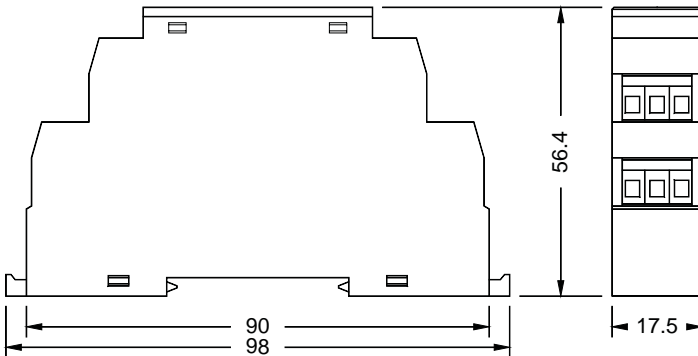

## Connections

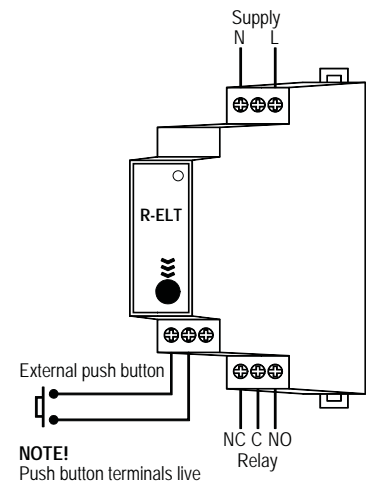

## CARREL ELECTRADE LTD

MANUFACTURERS, IMPORTERS AND DISTRIBUTORS OF ELECTRICAL ENGINEERING PRODUCTS  
 POSTAL ADDRESS: P O BOX 11078, ELLERSLIE 1542, AUCKLAND NEW ZEALAND  
 FACTORY AND OFFICE: 661 GREAT SOUTH ROAD, PENROSE 1061  
 TELEPHONE: +64-9-525 1753 FACSIMILE: +64-9-525 1756  
 CHRISTCHURCH BRANCH: 73B BRISBANE STREET, SYDENHAM  
 TELEPHONE: 03-366 1242 FACSIMILE: 03-379 1991  
 EMAIL: sales@carrel-electrade.co.nz WEB: www.carrel-electrade.co.nz

