



THREE PHASE ELECTRONIC KILOWATT-HOUR METER MODEL LP-3KW4



A three-phase kWh meter that is only 71 mm wide.

Semiconductor technology is used to produce a very compact electronic kWh meter as a replacement for electro-mechanical check meters. The meter is a three element device with three CT inputs giving true readings on 4 wire unbalanced systems. In addition to the integral 7 digit counter there is a pulse output for use with data loggers or similar electronic recorders or controllers. The compact circuitry employed allows this meter to be housed in a standard 4M wide Din rail mounting case.

Ordering information: Voltage inputs, VT ratio (i.e. 63.5V, 230V, 11kV/63.5V)
Current inputs, CT ratio (i.e. 1A, 5A, 1000/5A)
Pulse rate (i.e. 1 pulse/kWh, 1 pulse/0.1kWh)
Options: Frequency (60Hz), opto or relay output

Specifications

| | |
|-----------------------|--|
| Input | AC current and voltage, 3 phase 4 wire unbalanced load |
| | Current : 3 x 5A (1A optional) CTs - specify CT ratio when ordering |
| | Current burden : < 0.1VA |
| | Voltage : 3 x 230V Ph-N (others on request) |
| | Voltage burden : <0.25mA |
| | Frequency : 50Hz or 60Hz - specify when ordering |
| | Cutoff : <1 Watt x CT ratio |
| | Dynamic range : >500:1 |
| Outputs | : Integral 7 digit electro-mechanical counter with 0.1 or 1 kWh units & : NPN open collector optocoupler or dry contact relay both with 250msec pulses |
| Accuracy | : Class 1 to IEC 60688 |
| | Accurate range : 0 - 120% |
| Overload | Current input : 2 x nominal continuous |
| | : 20 x nominal for 3 seconds |
| | Voltage inputs : 1.2 x nominal continuous |
| | : 1.5 x nominal for 10 seconds |
| Isolation | Galvanic isolation between inputs and output circuit |
| | Current inputs : 4kV rms 50Hz for 1 minute, Impulse 5kV 1.2/50µsec waveform |
| | Voltage inputs to output : 2kV rms 50Hz for 1 minute |
| Temperature | Operating : 0°C to +23°C to +60°C |
| | Storage : -25°C to +70°C long term |
| | : -55°C to +85°C short term |
| EMC Compliance | : AS/NZS 61000.6.3:2012 |

CARREL ELECTRADE LTD


MANUFACTURERS, IMPORTERS AND DISTRIBUTORS OF ELECTRICAL ENGINEERING PRODUCTS
POSTAL ADDRESS: P O BOX 11078, ELLERSLIE 1542, AUCKLAND NEW ZEALAND
FACTORY AND OFFICE: 661 GREAT SOUTH ROAD, PENROSE 1061
TELEPHONE: +64-9-525 1753 FACSIMILE: +64-9-525 1756
CHRISTCHURCH BRANCH: 73B BRISBANE STREET, SYDENHAM
TELEPHONE: 03-366 1242 FACSIMILE: 03-379 1991
EMAIL: sales@carrel-electrade.co.nz WEB: www.carrel-electrade.co.nz






THREE PHASE ELECTRONIC KILOWATT-HOUR METER MODEL LP-3KW4

Dimensions

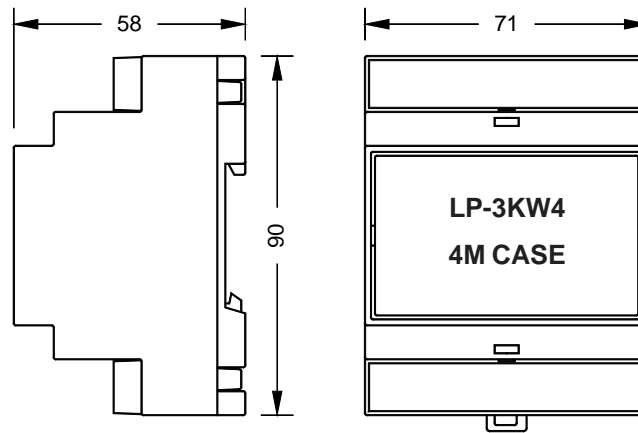

LP-3KW4 Connections

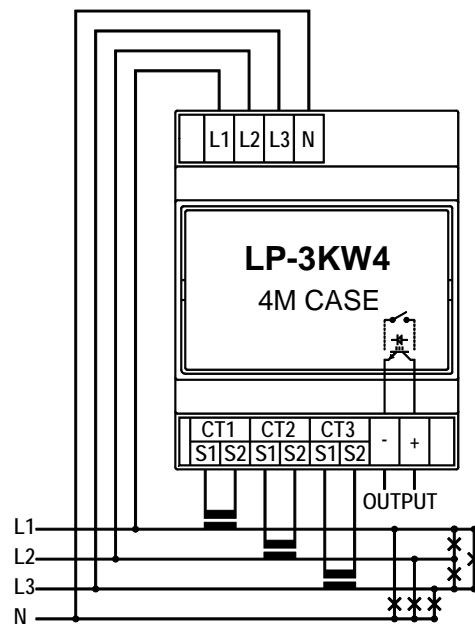

Output open collector
opto coupler or relay