

# Technical Data Sheet

CODE 11232

## M 100/4" AT LL

Wall/window axial fans




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,1	Ø Discharge Hole (mm)	99
Absorbed Power max (W)	18	Voltage (V)	230-240
Frequency (Hz)	50	Weight (Kg)	0,6
Inlet	Automatico	Delivery max (l/s)	25
Insulation Class	II°	Delivery max (m <sup>3</sup> /h)	90
IP	X4	Pressure max (mmH2O)	3
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	29
Nominal Diameter (mm)	100	RPM	2300
		Sound Pressure level Lp [dB (A)] 3m	37,5

### DIMENSIONS

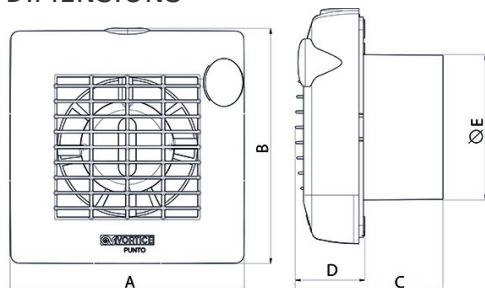

Etichetta Energetica	NO
Size A (mm)	159
Size B (mm)	160
Size C (mm)	100
Size D (mm)	47
Size E (mm)	Ø 99

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 11232

## M 100/4" AT LL

Wall/window axial fans



### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 90 m<sup>3</sup>/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- Equipped with system by which the louvres of the grille are opened and closed automatically.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### ACCESSORIES



**F 100/4"**

Code 22131



**S 100/4**

Code 22154

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)