



# SOLITRONICS ENGINEERING LTD.

2202, Perfect Ind. Bldg, 31 Tai Yau St, San Po Kong, Kowloon, Hong Kong S.A.R., China

TEL : (852) 2730-8145

FAX : (852) 2730-3245

E-mail : info@solitronics.com

## IEC Ø22mm Self-flashing LED Pilot-Light Self-flashing Buzzer & Panel-Mount Buzzer

Date:

**25<sup>th</sup> July 2012**

Group:

Ø22mm LED Pilot-Lights

Part Number: (17 digits)

**SEL-22D-XX-XXXV-X**

Data Sheet:

**SE-IND-22D-S5-FZ**

**Matching Panel-Mount Device for Multi-chip LED Pilot-Lights**

Fig.-1 Form-FS



**IP65**

Fig.-2 Form-BF




**IP40**

Fig.-3 Form-BZ



**IP40**

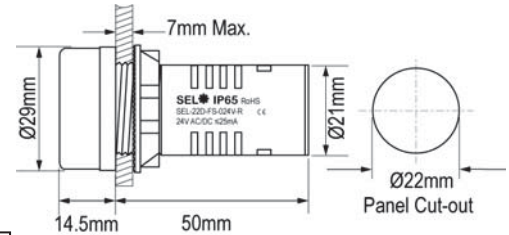

**Self-Flashing LED Pilot-Light**  
Flashing Rate: 2Hz  
Current: 15-25mA

**Flashing LED Pilot-Light with Intermittent-Tone Buzzer**  
80 db at 10 cm  
Current: 15-25mA

**Panel-Mount Buzzer with Intermittent-Tone**  
80 db at 10cm  
Current: 15-25mA



Solitronics Part No.	Colour (nm)	Nominal Rated-Voltage	Configuration	Figure No. Lens-Type & Colour	Remarks
SEL-22D-FS-012V-R	625 nm	12V AC/DC	Self-Flashing Indicator Typical 4-chips Multi-LED Red	Fig.-1 Form-FS D-Type Form FS (Transparent Red-Lens + Diffuser)	
SEL-22D-FS-024V-R		24V AC/DC			
SEL-22D-FS-036V-R		36V AC/DC			
SEL-22D-FS-048V-R		48V AC/DC			
SEL-22D-FS-130V-R		130V AC/DC			
SEL-22D-FS-230V-R		230V AC only			
SEL-22D-FS-380V-R		380V AC only			
SEL-22D-FS-012V-A	605 nm	12V AC/DC	Self-Flashing Indicator Typical 4-chips Multi-LED Amber  Note: Yellow (587nm) on request	Fig.-1 Form-FS D-Type Form FS (Transparent Amber-Lens + Diffuser)	
SEL-22D-FS-024V-A		24V AC/DC			
SEL-22D-FS-036V-A		36V AC/DC			
SEL-22D-FS-048V-A		48V AC/DC			
SEL-22D-FS-130V-A		130V AC/DC			
SEL-22D-FS-230V-A		230V AC only			
SEL-22D-FS-380V-A		380V AC only			
SEL-22D-BF-012V-R	625 nm	12V AC/DC	Flashing Indicator with Intermittent-Tone Buzzer Typical 2-chips Multi-LED Red	Fig.-2 Form-BF D-Type Form BF (Transparent Red-Lens with Holes)	
SEL-22D-BF-024V-R		24V AC/DC			
SEL-22D-BF-036V-R		36V AC/DC			
SEL-22D-BF-048V-R		48V AC/DC			
SEL-22D-BF-130V-R		130V AC/DC			
SEL-22D-BF-230V-R		230V AC only			
SEL-22D-BF-380V-R		380V AC only			
SEL-22D-BF-012V-A	605 nm	12V AC/DC	Flashing Indicator with Intermittent-Tone Buzzer Typical 2-chips Multi-LED Amber  Note: Yellow (587nm) on request	Fig.-2 Form-BF D-Type Form BF (Transparent Amber-Lens with holes)	
SEL-22D-BF-024V-A		24V AC/DC			
SEL-22D-BF-036V-A		36V AC/DC			
SEL-22D-BF-048V-A		48V AC/DC			
SEL-22D-BF-130V-A		130V AC/DC			
SEL-22D-BF-230V-A		230V AC only			
SEL-22D-BF-380V-A		380V AC only			
SEL-22D-BZ-012V-K	Not Applicable	12V AC/DC	Panel-Mount with Intermittent-Tone Buzzer only	Fig.-3 Form-BZ D-Type Form BZ (Opaque Black-Lens with holes)	
SEL-22D-BZ-024V-K		24V AC/DC			
SEL-22D-BZ-036V-K		36V AC/DC			
SEL-22D-BZ-048V-K		48V AC/DC			
SEL-22D-BZ-130V-K		130V AC/DC			
SEL-22D-BZ-230V-K		230V AC only			
SEL-22D-BZ-380V-K		380V AC only			

Remarks: Due to continuous development, all specifications are subject to change without prior notice. Please confirm all details at time of ordering.