



ISOLATOR & SELECTOR SWITCHES



RT SERIES

Panel mounting through 22mm hole,
protected rear access terminals, double-break contacts

Configurations:

1 or 3-pole Changeover with OFF Isolator Switch,
90° operation, 16, 25 or 32A

1 or 3-pole ON/OFF Isolator Switch, 90° operation, 16, 25 or 32A

4-position Voltmeter Selector Switch, ph/ph connection

7-position Voltmeter Selector Switch, ph/ph and ph/neutral connection

4-position Ammeter Selector Switch, 3 phases & OFF

S SERIES

3-pole ON/OFF Isolator Switch
90° operation

3-pole changeover with OFF Isolator Switch
60° operation

double-break contacts, 63 or 100A


IP55 front panel protection

door-clutch mounting system, door opening in
all positions



ENCLOSED ISOLATOR SWITCH

1 or 3-pole ON/OFF Isolator Switch
90° operation
double-break contacts, 16, 25, 32 or 63A
IP65 ABS plastic enclosure
operator padlockable in OFF position
Yellow/Red or Grey/Black operators

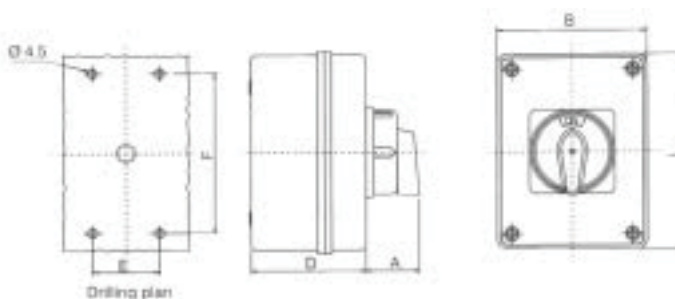

TYPE	A	L	B	D	E	F
RT16	42	110	80	66	60	90
RT25/RT32	42	125	100	70	80	115
RT63	48	175	125	90	105	155